

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 June 2005 (02.06.2005)

PCT

(10) International Publication Number
WO 2005/050152 A1

(51) International Patent Classification⁷: **G01K 13/00**,
1/08

[AT/AT]; Oberfresch 15, A-6800 Feldkirch (AT). UWE,
Diegel [DE/FR]; Microlife France, 27, rue Taitbout,
F-75009 Paris (FR).

(21) International Application Number:
PCT/EP2004/012169

(74) Agents: **HEPP, Dieter et al.**; Hepp Wenger Ryffel AG,
Friedtalweg 5, CH-9500 Wil (CH).

(22) International Filing Date: 28 October 2004 (28.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03024859.5 31 October 2003 (31.10.2003) EP

(71) Applicant (for all designated States except US): **MI-
CROLIFE INTELLECTUAL PROPERTY GMBH**
[CH/CH]; Max Schmidheiny-Strasse 201, CH-9435 Heer-
brugg (CH).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FRICK, Gerhard**

[Continued on next page]

(54) Title: THERMOMETER WITH TWO OPERATING MODES, DEVICE FOR RESETTING A THERMOMETER, SYSTEM COMPRISING A THERMOMETER AND A RESETTING DEVICE AND A METHOD FOR RESETTING A THERMOMETER

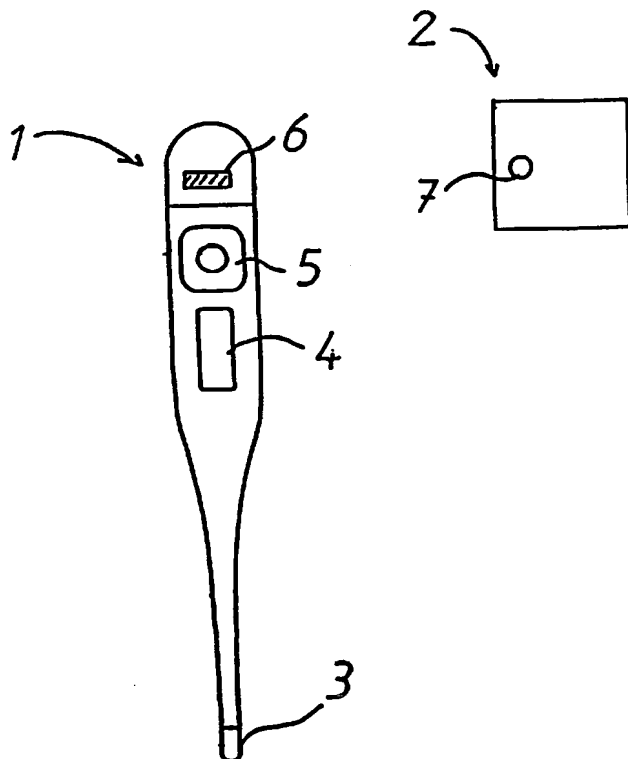

(57) Abstract: The invention relates to a system comprising a digital medical thermometer (1) and a device (2) for resetting said thermometer (1). Said thermometer (1) has at least two operating modes, a first operational mode and a second non-operational mode. Further it comprises a receiver unit (6) adapted for receiving a reset signal and an electrical controlling unit. This controlling unit has means for setting the thermometer (1) into the second non-operational mode after a temperature measurement, means for identifying the reset signal and means for resetting the thermometer (1) into the first operational mode when said signal fulfils a predetermined criterion. The device (2) for resetting the thermometer (1) into the operational mode has a transmitter (7) to send a signal to the thermometer (1). The receiver unit (6) of the thermometer (1) is adapted to receive the signal of the transmitter (7).

WO 2005/050152 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*